








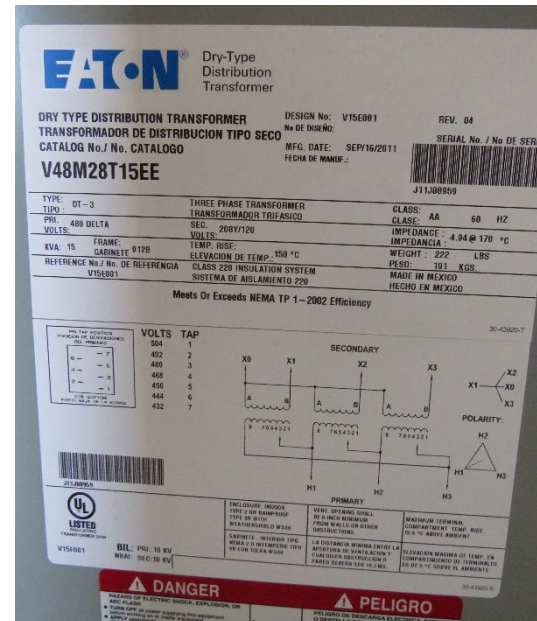

Transformer
Catalog Number **9T23B3872** TYPE QL

30.0 kVA 60 Hz 3 PH 5.8% IMP
40C AMBIENT 150C RISE 220C SYSTEM IS-19C

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
120 VOLTS (LINE-NEUTRAL)

JUMPER CONNECTION TAP VOLTS

TAP	VOLTS
1	583
2	492
3	480
4	469
5	455
6	443
7	432

COIL TAP ARRANGMENT

1	2	3	4	5	6	7
1	2	3	4	5	6	7

ENCLOSURE TYPE 2(IP30).RAINPROOF TYPE 3R(IP32) WHEN PROVIDED WITH SHIELD KIT 9T18Y4317685

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
ALUMINUM CONDUCTOR PRIMARY: 10KV BIL SECONDARY: 10KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

NET WGT 300 LB



EATON Dry-Type Distribution Transformer

DESIGN No. V764801 REV. 07
No. DE DISEÑO: JUN/27/2014 SERIAL No. / No. DE OTIMO: 314871243

DRY TYPE DISTRIBUTION TRANSFORMER
TRANSFORMADOR DE DISTRIBUCION TIPO SECO
CATALOG No./ No. CATALOGO **V48M28T75EE**

TYPE: D1-3 THREE PHASE TRANSFORMER CLASS: AA 60 HZ
PR. VOLTS: 480 DELTA SEC. 208V/120 VOLTS. IMPEDANCE: 5.8% @ 170 °C
KVA: 75 FRAME: 914F TEMP. RISE: ELEVACION DE TEMP: 150 °C WEIGHT: 354 LBS
REFERENCE No./ No. DE REFERENCIA V758801 CLASICO INSULACION SISTEMA SISTEMA DE AISLAMIENTO 220 MADE IN MEXICO HECHO EN MEXICO

Meets Or Exceeds NEMA TP 1-2002 Efficiency

VOLTS TAP

TAP	VOLTS
1	564
2	483
3	480
4	466
5	456
6	444
7	432


COIL TAP ARRANGMENT

1	2	3	4	5	6	7
1	2	3	4	5	6	7



UL LISTED BIL. 10KV 10KV 10KV 10KV 10KV 10KV 10KV



PELIGRO



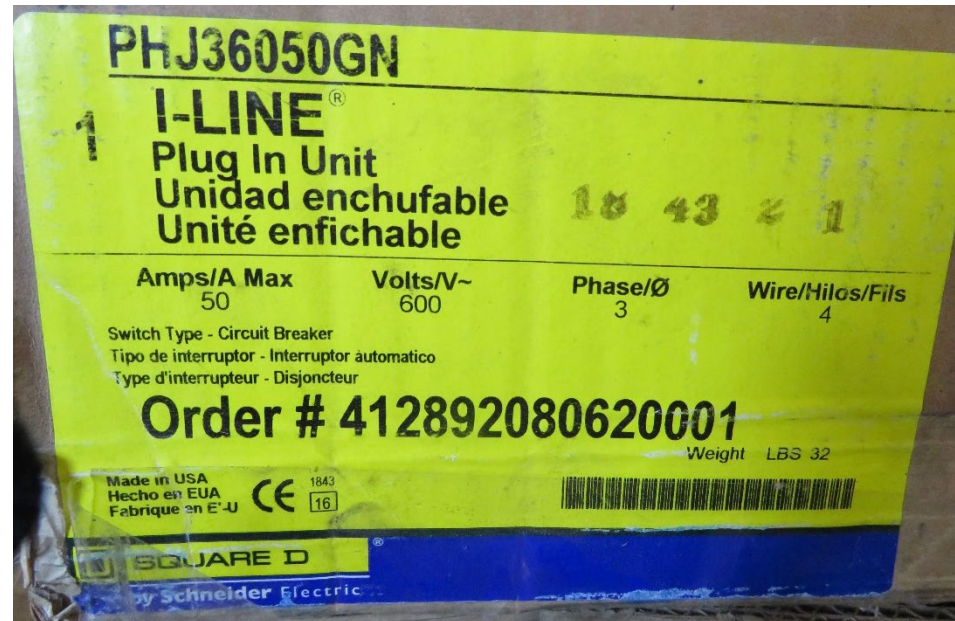





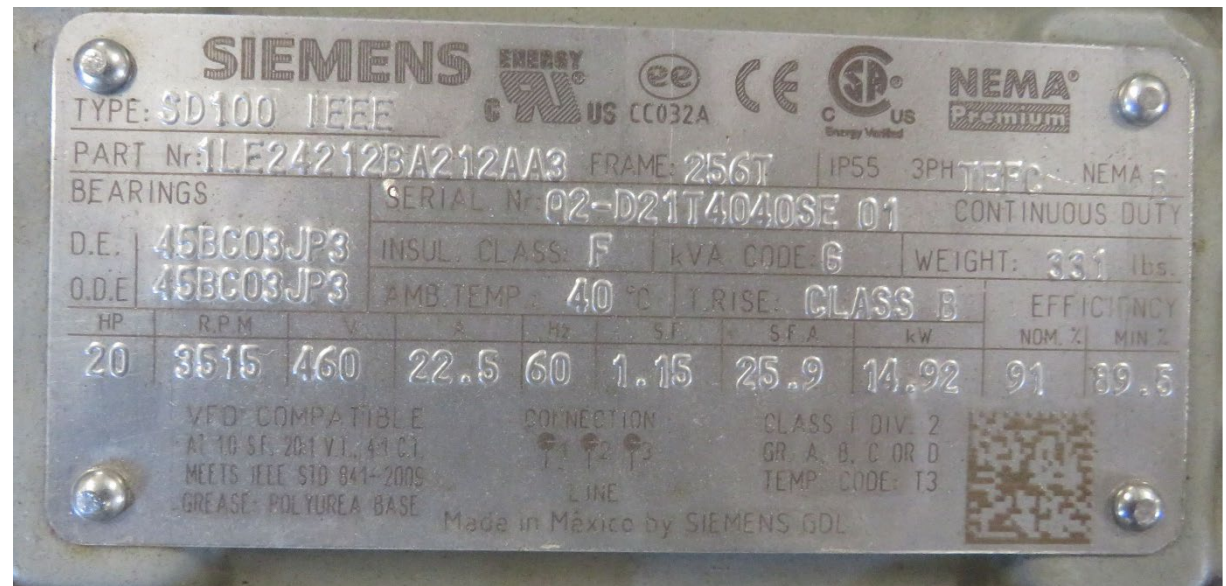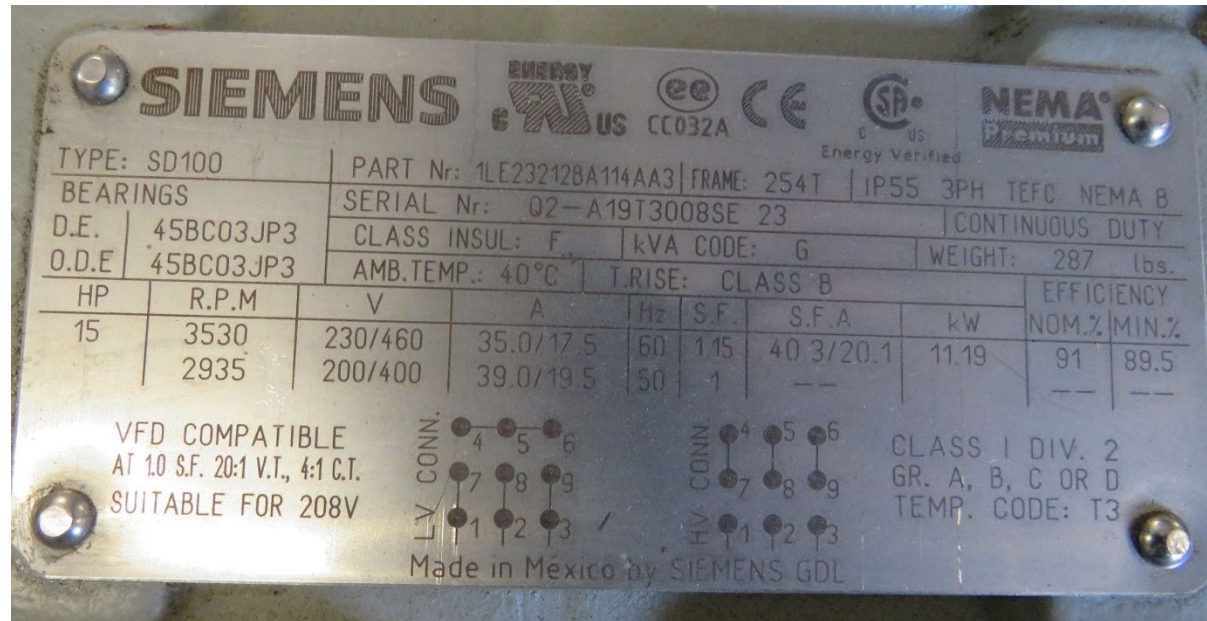

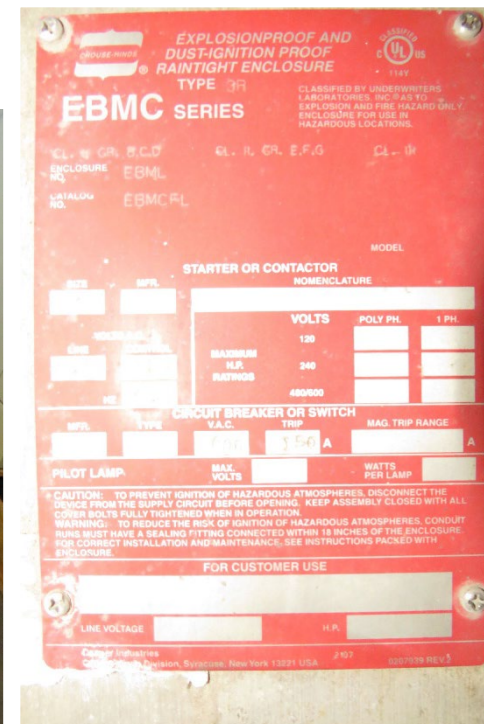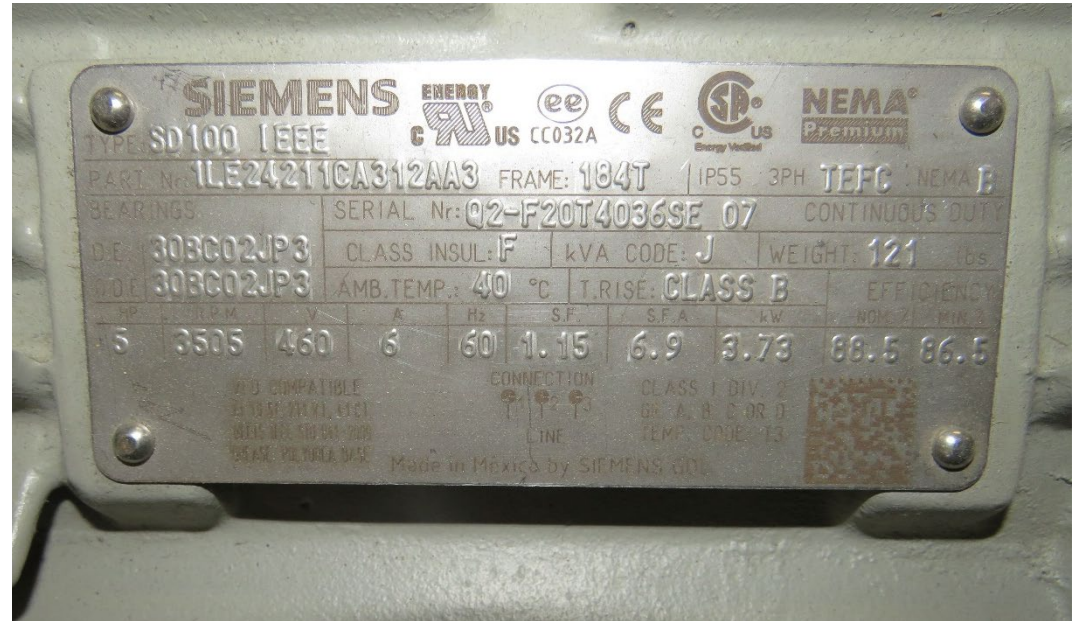



SLE 22-015 Electrical Sale

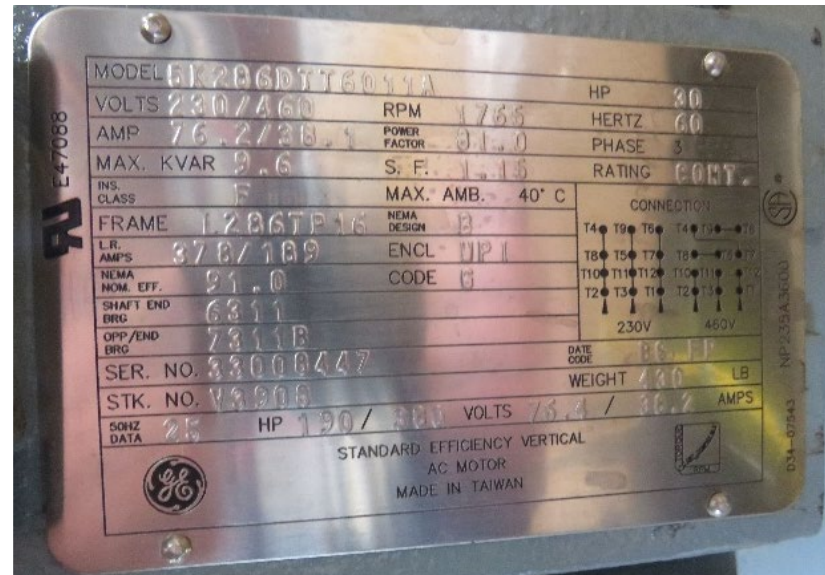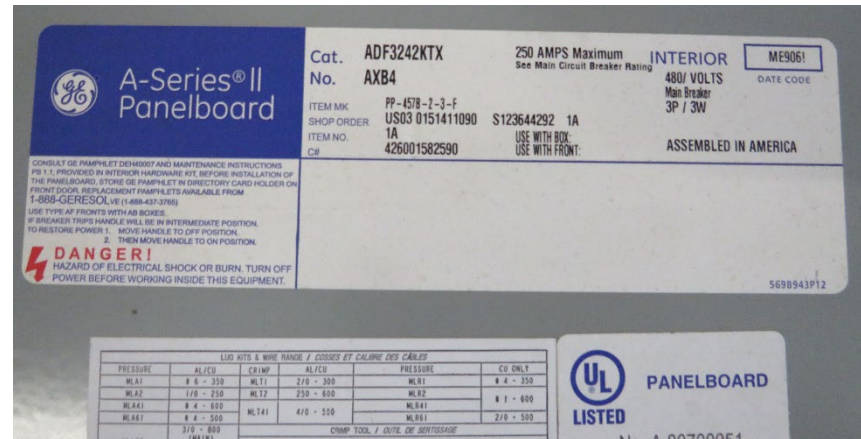



SLE 22-015 Electrical Sale

